

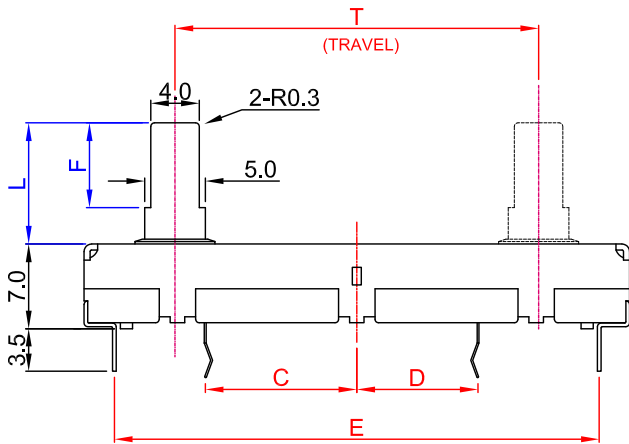
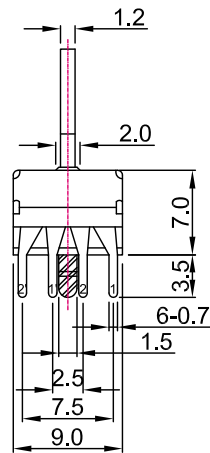



外形图 Mechanical Dimensions

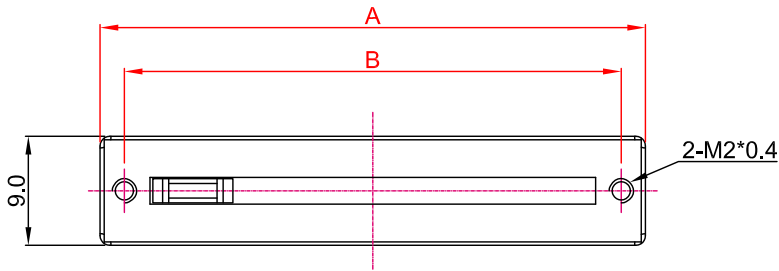

接线图 Circuit explanation

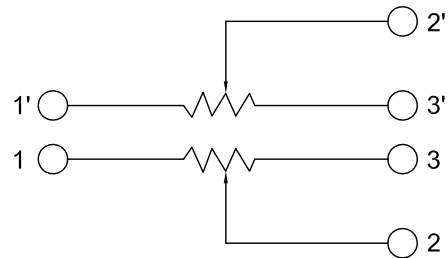

安装孔位图 P.C.B. mounting hole detail

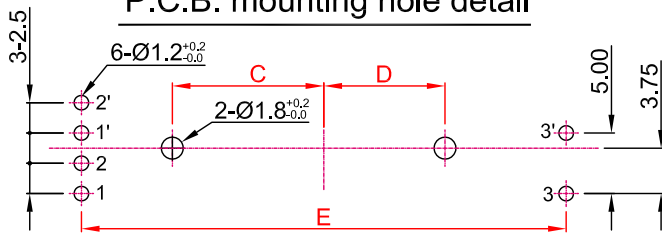




C1型金属推柄 (C1 type Metal Lever)

	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
X	A	B	C	D	E
L	10	15	20	25	30
F	7	10	10	10	10

	MODEL NO.	T	A	B	C	D	E
<input type="checkbox"/>	C2044G	20	35	31	7.5	5	30
<input type="checkbox"/>	C2544G	25	40	36	10	7.5	35
<input type="checkbox"/>	C3044G	30	45	41	12.5	10	40
<input type="checkbox"/>	C4544G	45	60	56	17.5	15	55
<input checked="" type="checkbox"/>	C6044G	60	75	71	25	22.5	70

3			PRODUCT NAME	Slide Potentiometer		
2			MODEL NAME	C □ □ 44G- □ A2-value		
1	NO	DATE	DESCRIPTION	APPROVED BY	CHECKED BY	DRAWN BY
				R & D 2018/4/28 Eva	R & D 2018/4/28 Sophie	R & D 2018/4/28 Dick
	DIMENSION	TOLERANCE	SCALE			
	$\int \leq 10$	± 0.2	UNIT	mm		
	$10 < \int \leq 30$	± 0.5	VER.	A0		
	$30 < \int \leq 100$	± 1.0	DATE	2018/4/28		
	All Angles	$\pm 5^\circ$				


直滑式 Rotary Potentiometers series Specifications

1.電氣性能 (Electrical Characteristics)					
1.1	全阻抗值 (Total Resistance)	1K Ω ~ 2M Ω			
1.2	全阻抗值允许偏差 (Total Resistance Tolerance)	$\pm 20\%$ (More than 1 M Ω $\pm 30\%$)			
1.3	電阻隨溫度變化特性 (Resistance of temperature change character)	20 $^{\circ}$ C-75 $^{\circ}$ C: $\Delta R/R \leq \pm 5\%$, -25 $^{\circ}$ C-20 $^{\circ}$ C: $\Delta R/R \leq \pm 4.5\%$			
1.4	阻值變化特性 (Resistance Taper)	A, B, C, W			
1.5	零位阻值 (Residual Resistance)	R $\geq 250K\Omega$ / 0.1 % max. of total Value 250K Ω >R>10K Ω / 20 Ω max. 10K Ω \geq R / 10 Ω max.			
1.6	額定功率 (Rated Power)	Linear Taper B: 0.1W Other Taper:0.05W			
1.7	最高使用電壓 (Max.Operating Voltage)	50V AC			
1.8	動雜音 (Rotational Noise)	Less Than 100mV			
1.9	絕緣阻抗 (Insulation Resistance)	More than 100M Ω at DC 250V			
1.10	耐電壓 (Withstand Voltage)	For 1 minute at: AC 300V			
1.11	开关額定功率(Switch Rated Power)	-----			
1.12	同步誤差 (Gang Error)	0dB~-40dB \leq 3dB			
2.機械性能 (Mechanical Characteristics)					
2.1	滑动行程 (Slide travel)	T=60 \pm 1.0mm			
2.2	滑动力矩 (Operating force)	10~200gf.cm			
2.3	柄的拉、押強度 (Pull-Push Strength)	Pull 3Kgf.cm / Push 5 Kgf.cm			
2.4	滑动止檔強度 (Rotational Stop-End Torque)	5 kgf.cm Min			
2.5	推柄摆动度 (Lever wobble)	2xL/25mm Max. (L=Lever length)			
2.6	旋轉定位數目 (Number of Detents(click))	detent: 0 ; 1 centre Click			
2.7	焊錫耐熱性 (Resistance To Soldering Heat)	260 \pm 5 $^{\circ}$ C and less than 3 seconds			
3.耐久性能 (Durability)					
3.1	回轉壽命 (Rotation Life)	10,000 Cycles min.			
3.2	工作溫度 (Operating temperature)	-10 $^{\circ}$ C ~ +70 $^{\circ}$ C			
4.1	外形尺寸圖/曲線特性圖 (Shape size drawing/curve characteristic drawing)	見附頁 Please refer the drawing			
批 准		審 核		設 計	


RESISTANCE TAPER




TAPER B SERIES

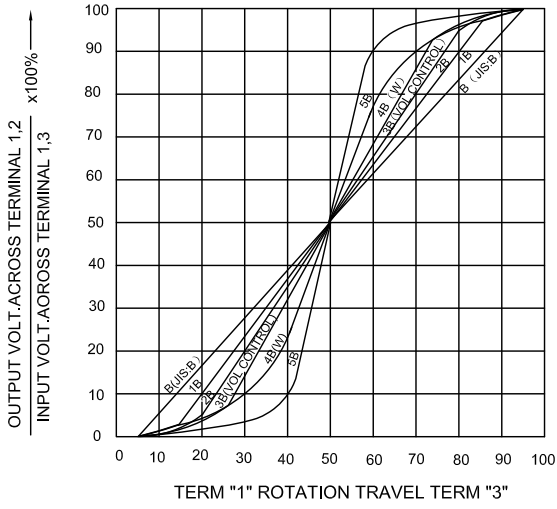


TAPER B WITH 50% TAP

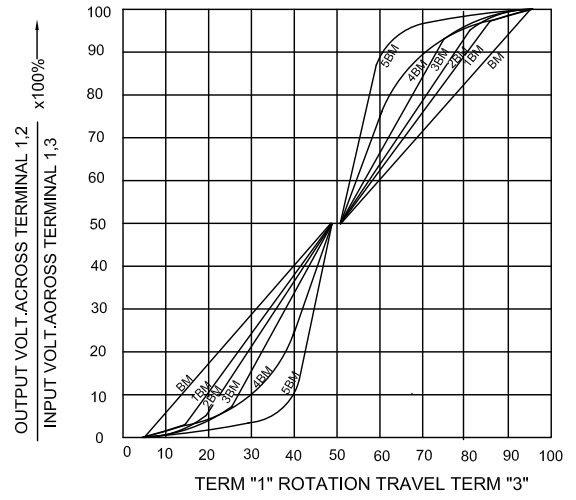


TAPER A SERIES

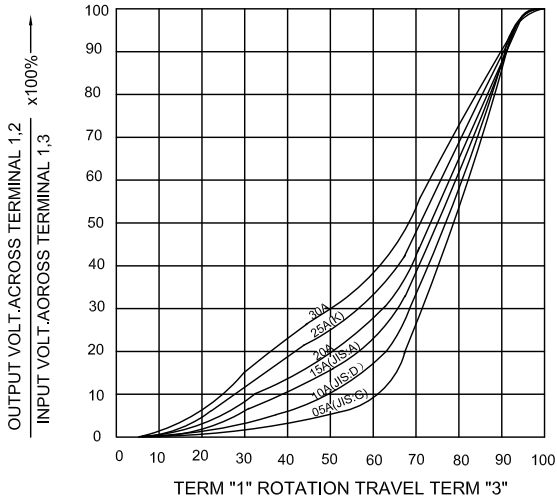

TAPER A & C WITH 50% TAP

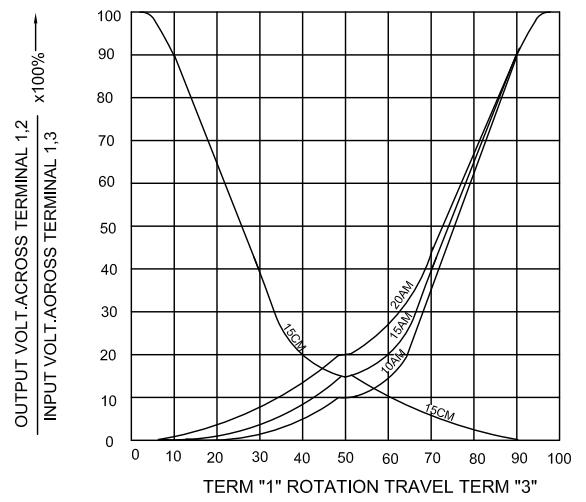

TAPER C SERIES

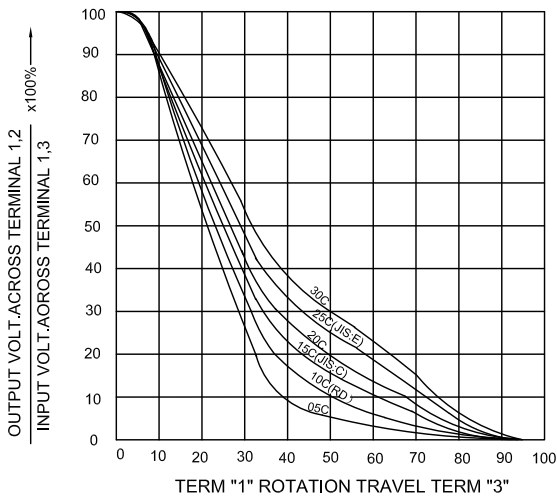

TAPER M & N SERIES

