

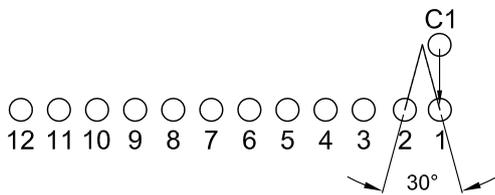
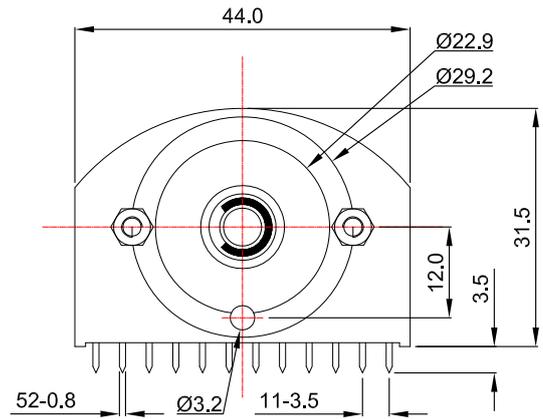


外形图 Mechanical Dimensions

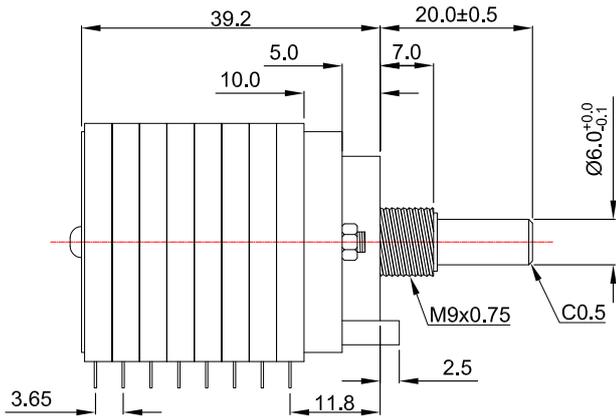


Switch pole 电性回路示意图

- A段: 4个C1-1 G段: 4个C1-7
- B段: 4个C1-2 H段: 4个C1-8
- C段: 4个C1-3 I段: 4个C1-9
- D段: 4个C1-4 J段: 4个C1-10
- E段: 4个C1-5 K段: 4个C1-11
- F段: 4个C1-6 L段: 4个C1-12

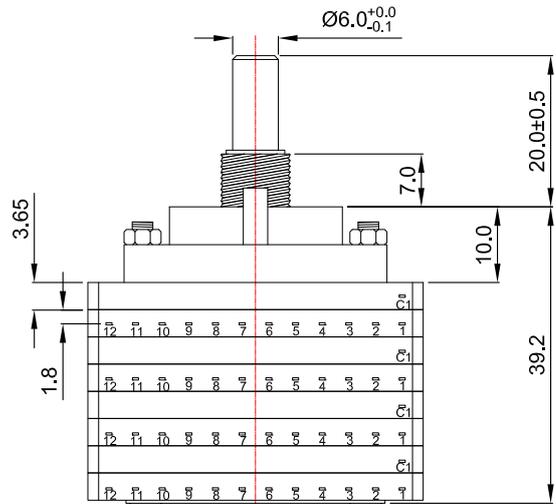

安装孔位置图

P.C.B. mounting hole detail

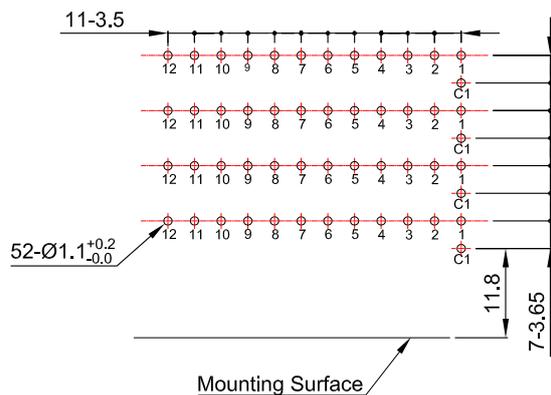

1. SWITCH RATING : DC 30V 0.5A
2. WITHSTAND VOLTAGE : for 1 minute at DC 500V
3. INSULATION RESISTANCE: DC 500V 100MΩ MIN
4. CONTACT RESISTANCE: 25mΩ MAX
5. SWITCH LIFE: 10,000 cycles
6. SOLDERING HEAT : 260 degree and less than 5 seconds
7. TORQUE: 1 TO 2 SECTION 0.8kg±0.2kg
OVER 3 SECTION 2.5kg±1kg

3				PRODUCT NAME	Rotary switch		
2				MODEL NAME	RS44-4-4-12-7-20R		
1				APPROVED BY	CHECKED BY	DRAWN BY	
NO	DATE	DESCRIPTION					
DIMENSION	TOLERANCE	SCALE					
$\int \leq 10$	± 0.2	UNIT	mm				
$10 < \int \leq 30$	± 0.5	VER.	A0				
$30 < \int \leq 100$	± 1.0	DATE	2017/12/8				
All Angles				$\pm 5^\circ$			