
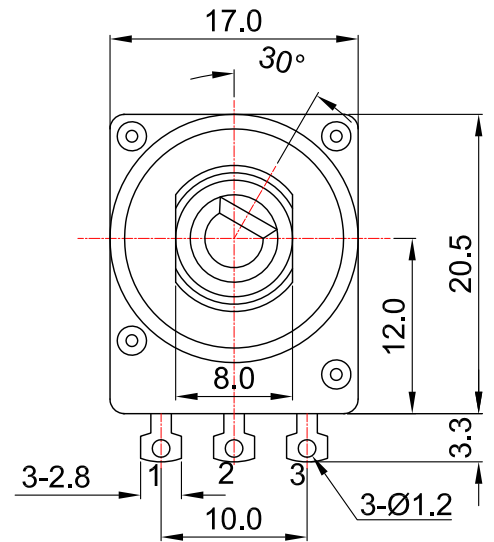


外形图 Mechanical Dimensions


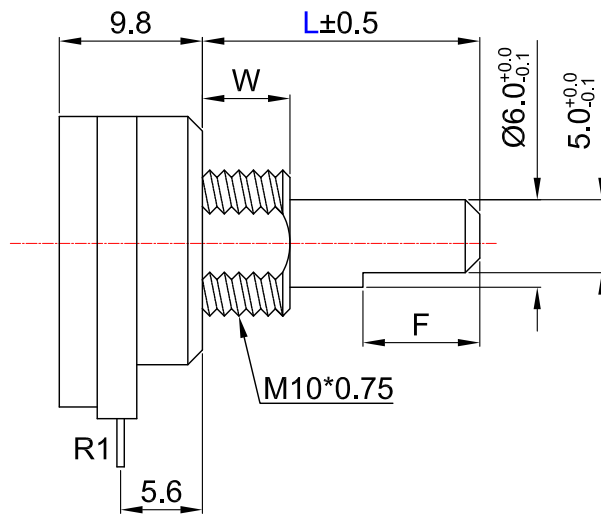


Shaft shown in full C.C.W. position

F type plastic shaft

L	17	19
F	8.0	
W	6.0 / 8.0	

接线图
Circuit explanation

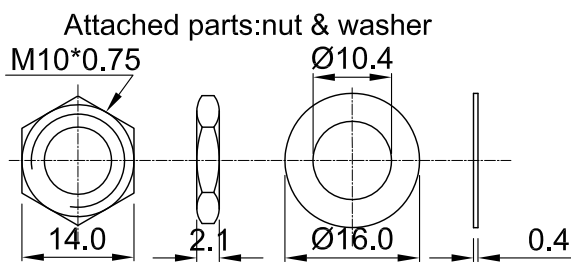

3			PRODUCT NAME	Rotary Potentiometer		
2			MODEL NAME	R16RN- L B1-value-HH-V01		
1			APPROVED BY	CHECKED BY	DRAWN BY	
NO	DATE	DESCRIPTION				
	DIMENSION	TOLERANCE	SCALE			
	$\int \leq 10$	± 0.2	UNIT	mm		
	$10 < \int \leq 30$	± 0.5	VER.	A0		
	$30 < \int \leq 100$	± 1.0	DATE	2018/4/11		
	All Angles	$\pm 5^\circ$				


16 mm Rotary Potentiometers with SW series Specifications

1.電氣性能 (Electrical Characteristics)					
1.1	全阻抗值 (Total Resistance)			1KΩ ~ 2MΩ	
1.2	全阻抗值允許偏差 (Total Resistance Tolerance)			±20% (More than 1 M Ω ±30%)	
1.3	電阻隨溫度變化特性			20℃-75℃:△R/R≤±5%,	
	(Resistance of temperature change character)			-25℃-20℃:△R/R≤±4.5%	
1.4	阻值變化特性 (Resistance Taper)			A, B	
1.5	零位阻值 (Residual Resistance)			R≥250KΩ / 0.1 % max. of total Value 250KΩ>R>10KΩ / 20Ω max. 10KΩ≥R / 10Ω max.	
1.6	額定功率 (Rated Power)			Linear Taper B: 0.5W Other Taper:0.2W	
1.7	最高使用電壓 (Max.Operating Voltage)			250VAC	
1.8	動雜音 (Rotational Noise)			Less Than 100mV	
1.9	絕緣阻抗 (Insulation Resistance)			More than 100MΩ at DC 250V	
1.10	耐電壓 (Withstand Voltage)			For 1 minute at: DC 500V	
1.11	开关额定功率(Switch Rated Power)			-----	
2.機械性能 (Mechanical Characteristics)					
2.1	全回轉角度 (Rotation Angle)			300°±5°	
2.2	旋轉力矩 (Rotation Torque)			10~100gf.cm	
2.3	軸的拉、押強度 (Pull-Push Strength)			6 Kgf.cm	
2.4	轉動止檔強度 (Rotational Stop-End Torque)			5 kgf.cm Min	
2.5	开关角度(Switch Working Angel)			-----	
2.6	开关力矩(Switch Working Torque)			-----	
2.7	旋轉定位數目 (Number of Detents(click))			-----	
2.8	焊錫耐熱性 (Resistance To Soldering Heat)			260±5℃and less than 3 seconds	
3.耐久性能 (Durability)					
3.1	回轉壽命 (Rotation Life)			10,000 Cycles min.	
3.2	工作溫度 (Operating temperature)			-10℃~+70℃	
4.1	外形尺寸圖/曲線特性圖 (Shape size drawing/curve characteristic drawing)			見附頁 Please refer the drawing	
批准	R & D 2019/11/4 Eva	審核	R & D 2019/11/4 Sophie	設計	R & D 2019/11/4 Dick


RESISTANCE TAPER




TAPER B SERIES

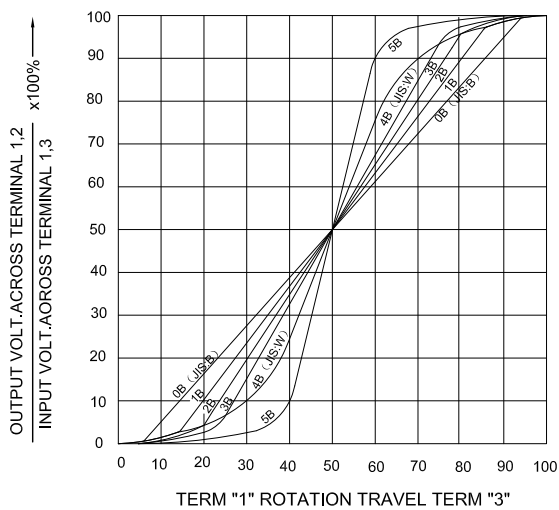


TAPER B WITH 50% TAP

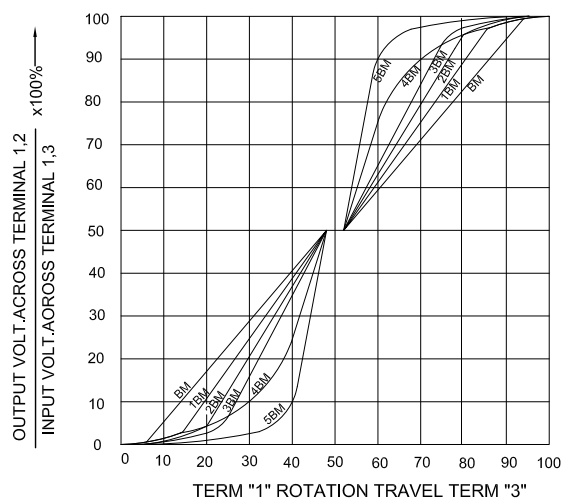


TAPER A SERIES

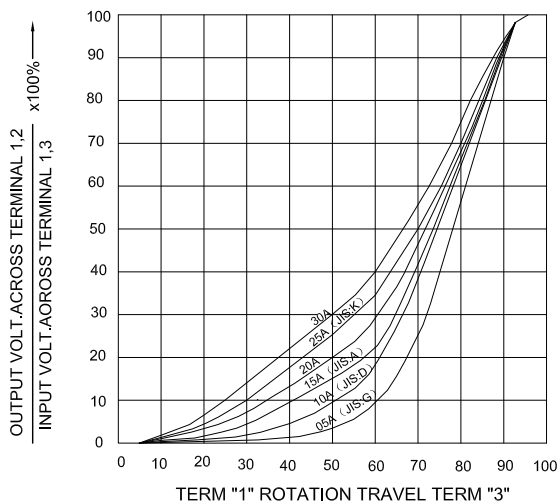

TAPER A & C WITH 50% TAP

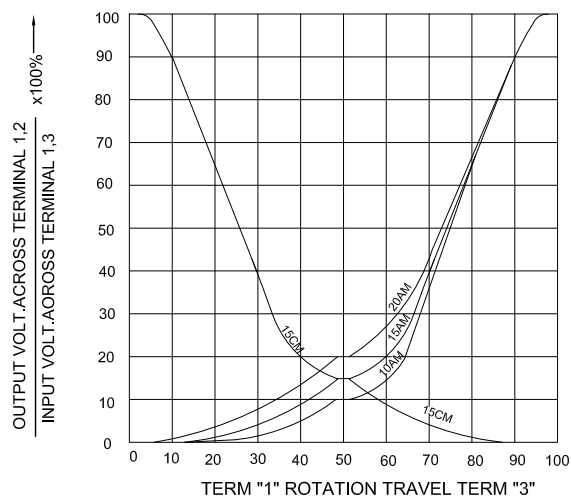

TAPER C SERIES

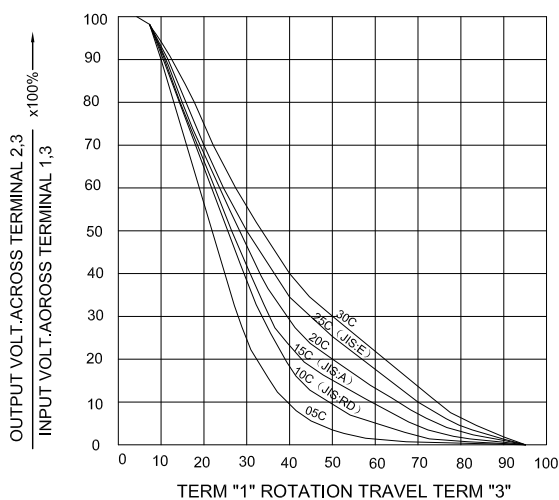

TAPER M & N SERIES

